


## SWING ST0516



1-3/3-14

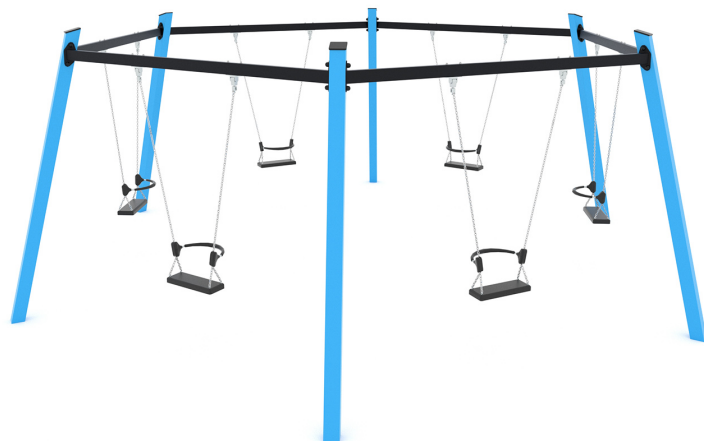

6 kids



54,5 m²

**R2**



**R5L**



### Material specification

- Hot-dip galvanized and powder coated or powder galvanized and powder coated construction of 100 x 100 mm profile,
- Hot-dip galvanized and powder coated or powder galvanized and powder coated or stainless steel construction elements,
- Attested, safe seats,
- Calibrated stainless steel chains, preventing fingers entrapment,
- Stainless steel swing fittings,
- Stainless steel screws and/or screws covered with plastic caps,
- Safe end caps on the top of the bar, made of durable HDPE plate, resistant to weather conditions,






**Physical development**



rocking



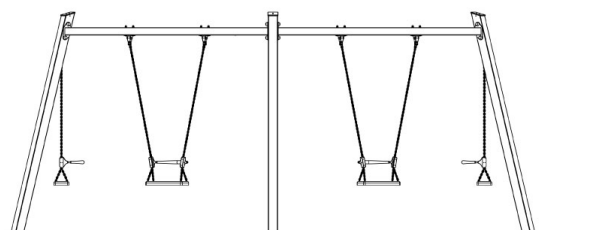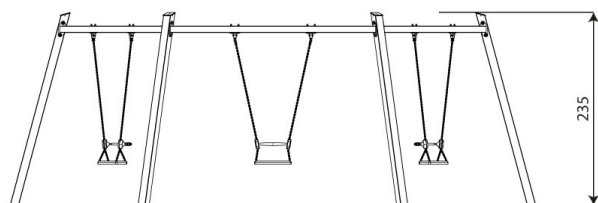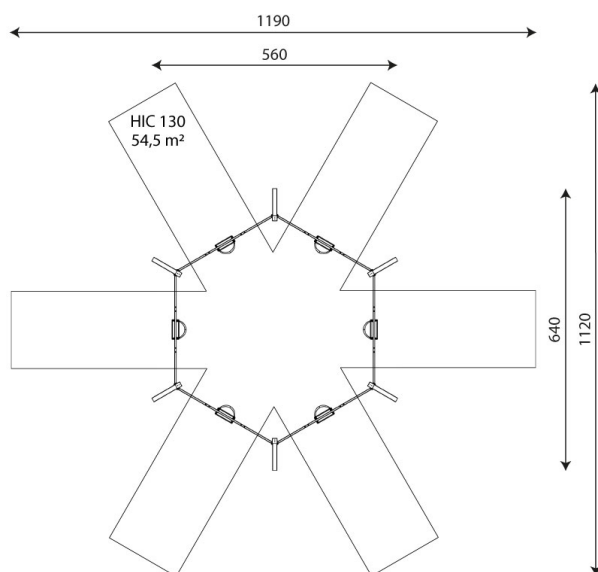

## Product technical sheet

# SWING ST0516

## Product data

Length	560 cm
Width	640 cm
Total height	235 cm
Age group	1-3/3-14 years
Number of users	6 kids
Safety zone	54,5 m2
Free fall height	130 cm
In accordance with norm EN	1176-1:2017
Weight of the heaviest part	18 kg
Dimensions of the largest part	310x10x10 cm
Availability of spare parts	YES
Installation time	4 h

## Color options



Data is subject to change without prior notice.

## Additional information

- equipment intended for public playgrounds;
- equipment has a certificate issued by an accredited entity or a declaration of conformity;
- available types of seats in the swing: R2-basket, R5-flat with barrier;
- no sharp edges or chinks that would pose a danger of jimmie the head, fingers or any other body parts;
- anchoring on flat surface, 80/70/60 cm deep;
- render is for reference only, the actual appearance of the equipment and its color may vary;

## Guarantee

**30**

30 year guarantee -  
Structural strength of steel  
and stainless steel  
components

**15**

15 year guarantee -  
Structural failure of steel  
and stainless steel, for  
dynamic equipment

**10**

10 year guarantee - Structural  
failure of high density  
polyethylene and high  
pressure laminates  
components

**5**

5 year guarantee - Corrosion of stainless  
steel and hot dip galvanized and powder  
coated components; against bark beetles  
and rot in case of wooden structural  
elements

Detailed information in the guarantee card



## Surfaces according to EN 1176-1:2017

	Description (mm)	Layer thickness (cm)	Maximum fall heights (cm)
Turf/ top layer of soil (A,B,C)	-	-	≤100
bark (A,C)	Particle size from 20 to 80	30	≤200
		40	≤300
woodchips (A,C)	Particle size from 5 to 30	30	≤200
		40	≤300
sand or gravel (A,C)	Particle size from 0,25 to 8	30	≤200
		40	≤300
synthetic attested (A,B,C)	Tested according to EN 1177		130

## Product technical sheet

# SWING ST0516

### Amount of safe surface corresponding with free fall height:

HIC 130 54,5 m<sup>2</sup>

Data is subject to change without prior notice.

